

## CAT® COMPACT WHEEL LOADER ATTACHMENT OPTIONS

For more information,  
visit [petersoncat.com/  
products/new/attachments](http://petersoncat.com/products/new/attachments)  
or contact us today.



**LET'S DO THE WORK.™**

AEXQ2097-01 November 2016

P45\_0419 © 2016 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

**LET'S DO THE WORK.™**

**PETERSON**



# SPEND LESS AND EARN MORE.

Equip one machine to do it all.

Invest in what you already own – equip your machine with a Cat® attachment and it becomes so much more. Our attachments are engineered, tuned and integrated into each Cat machine model. They promise to minimize stress and optimize performance. Browse our lineup and find the tools you need to get work done faster than ever before.



# AUGERS



## Bore with better efficiency.

Our augers offer different speed and torque options for work in a variety of soils. We've engineered their speed to extract soil efficiently and their torque to prevent stalling in dense ground. Select from a range of auger bits.

### Specifications

Attachment Models	Machine Models	Drive Shaft Torque @ Max Pressure		Drive Method
		Nm	(lb ft)	
A14B	903C2, 906M, 907M, 908M	2304	(1700)	Direct Drive
A19B	903C2, 906M, 907M, 908M	4122	(3042)	Single Planetary
A26B*	906M, 907M, 908M	6826	(5034)	Double Planetary

\*Requires high flow performance package on machine.

**Compact Wheel Loaders**

903C2   906M   907M   908M   910M   914M   918M

# BALE GRABS



## Grab baled material with greater precision.

Use our bale grabs for grasping, carrying and placing large baled materials. Its tubular arms eliminate damage to the wrapping or bale itself, while its rigid, high-strength steel frame extends working life. This attachment also comes with hardened pins and easily accessible grease points for greater productivity and a bolt-on step for safer cab access.

### Specifications

Attachment Models	Machine Models	Overall Width		Weight	
		mm	(in)	kg	(lb)
1803 mm (71 in)	903C2, 906M, 907M, 908M	1401	(55)	261	(575)
2133 mm (84 in)	903C2, 906M, 907M, 908M	1401	(55)	263	(580)

**Compact Wheel Loaders**

903C2   906M   907M   908M   910M   914M   918M

## BALE SPEARS



### Make moving bales simple.

Select from our single or dual spear design, both ideal for removing or placing bales in a stack. Our single-spear models include stabilizers and dual-spear models feature a high backrest for large loads. Spears are easily replaced and frames offer a bolt-on step.

#### Specifications

Attachment Models	Machine Models	Overall Width		Weight	
		mm	(in)	kg	(lb)
990 mm (39 in) Single Tine	903C2, 906M, 907M, 908M	1285	(51)	70	(154)
1245 mm (49 in) Single Tine	903C2, 906M, 907M, 908M	1285	(51)	72	(158)
990 mm (39 in) Dual Tine	903C2, 906M, 907M, 908M	1407	(55)	118	(260)
1245 mm (49 in) Dual Tine	903C2, 906M, 907M, 908M	1407	(55)	121	(266)

**Compact Wheel Loaders**

903C2 906M 907M 908M 910M 914M 918M

## BLADES



### Material movement made easy.

Our blades are made for moving and smoothing materials in multiple applications. Tilt the blade for aggressive cutting of material or pitch the blade back to spread material. Blades have replaceable, reversible cutting edges.

#### Specifications

Attachment Models	Machine Models	Width		Height	
		mm	(in)	mm	(in)
Angle	903C2, 906M, 907M, 908M	1829-2134	(72-84)	614	(24)
Dozer	906M, 907M, 908M	2002-2342	(79-92)	619	(24)

**Compact Wheel Loaders**

903C2 906M 907M 908M 910M 914M 918M

# BROOMS



## Do some serious sweeping.

Cat brooms are built for even-pressured sweeping for the most thorough debris removal. Our angle brooms are made for moving and windrowing debris aside. Our pickup brooms gather debris as they work and feature a gutter brush for building-base and close-to-the-curb cleaning. And our utility brooms gather light debris, ideal for factory floors. From collection hoppers to dust control features, we offer options for every application.

### Specifications

Attachment Models	Machine Models	Sweeping Width		Brush Diameter		
		mm	(in)	mm	(in)	
Angle	BA118C	903C2, 906M, 907M, 908M	2119	(83)	815	(32)
	BA25	910M, 914M, 918M	2500	(98)	700	(28)
Pickup	BP115C	903C2, 906M, 907M, 908M	1524	(60)	660	(26)
	BP118C	903C2, 906M, 907M, 908M	1829	(72)	660	(26)
	BP25	910M, 914M, 918M	2500	(98)	700	(28)
Utility	BU115	903C2, 906M, 907M, 908M	1510	(59)	660	(26)
	BU118	903C2, 906M, 907M, 908M	1865	(73)	660	(26)

**Compact Wheel Loaders**

903C2   906M   907M   908M   910M   914M   918M



# BUCKETS



## Move more material in less time.

The shape of our buckets improves digging, loading and material retention. Compared to most competition, we have more capacity per every inch of width. And each is made of high-strength, tempered steel. Select from a range of bucket teeth.

### Specifications

Attachment Models	Machine Models	Width		Interface	Weight	
		mm	(in)		kg	(lb)
<b>General Purpose</b>						
0.8 CYD w/ BOCE	903C2	1778	(70)	SSL	311	(686)
1.0 CYD w/ BOCE	903C2	1880	(74)	SSL	369	(814)
1.0 CYD - 1.7 CYD	906M, 907M, 908M	1880-2057	(74-81)	SSL, ISO	369-461	(814-1016)
1.7 CYD - 2.4 CYD	910M, 914M, 918M	2400	(94.5)	IT, Pin-on, ISO	469-667	(1034-1470)
1.8 CYD - 2.2 CYD	910M, 914M, 918M	2400	(94.5)	ISO	676-692	(1490-1525)
<b>Industrial Grapple</b>						
81"	906M, 907M, 908M	2057	(81)	SSL	587	(1295)
<b>Light Material</b>						
1.3 CYD w/ BOCE	903C2	1778	(70)	SSL	391	(862)
1.6 CYD w/ BOCE	906M, 907M, 908M	2057	(81)	SSL, ISO	461-515	(1016-1135)
<b>Mixing Buckets</b>						
200L (0.26 CYD)	906M, 907M, 908M	1600	(63)	SSL	290	(639)
250L (0.33 CYD)	906M, 907M, 908M	1600	(63)	SSL	430	(948)
<b>Compact Wheel Loaders</b>						
903C2	906M	907M	908M	910M	914M	918M

# COLD PLANERS



## Mill asphalt and concrete quickly.

Our cold planers are made to smooth imperfections and remove deteriorated pavement or paint where dedicated planers can't. A hydraulic side-shift feature allows for planing close to curbs, walls and other obstructions. And our self-leveling technology ensures consistent ground contact.

### Specifications

Attachment Models	Machine Models	Drum Width		Number of Bits (Conical)
		mm	(in)	
PC104B	906M, 907M, 908M	350	(14)	42
PC205B*	906M, 907M, 908M	450	(18)	48
PC306B*	906M, 907M, 908M	600	(24)	60
PC310B*	906M, 907M, 908M	1000	(40)	78

\*Requires high flow option and work tool wiring harness.

<b>Compact Wheel Loaders</b>						
903C2	906M	907M	908M	910M	914M	918M

# FORKS



## Transport more materials.

From stacked feedbags to loose straw, load and transport in less time. Our pallet forks were specifically designed to transport palletized items. Our utility forks are ideal for pierceable materials like dried livestock waste or straw. Optional grapples improve material retention so work is always neat and always efficient.

### Specifications

Attachment Models	Machine Models	Width		Interface	Tine Length		Fork Tine Width	
		mm	(in)		mm	(in)	mm	(in)
Pallet	903C2	1168	(46)	SSL	914-1067	(36-42)	102	(4)
Pallet*	906M, 907M, 908M	1397	(55)	SSL, ISO	1118-1219	(44-48)	102	(4)
Pallet**	910M, 914M, 918M	1549	(61)	IT, ISO	1067-1372	(42-54)	127	(5)

\*7" vertical extension available.  
\*\* Offset fork tines available.

Compact Wheel Loaders						
903C2	906M	907M	908M	910M	914M	918M

# MATERIAL HANDLING ARMS



## Carry and place with precision.

Safely transport non-uniform materials, as well as plants, trees or shrubs. Cat material handling arms offer two lifting points, each set up to hold a locking hook capable of swiveling 360 degrees.

### Specifications

Attachment Model	Machine Models	Width w/side step		Load Length (end point)	
		mm	(in)	mm	(in)
Fixed Length	903C2, 906M, 907M, 908M	1309	(52)	768	(30)
3 Position Adjustable	910M, 914M, 918M	606	(24)	2006-3937	(79-155)

Compact Wheel Loaders						
903C2	906M	907M	908M	910M	914M	918M

# RAKES



## Sort with speed.

Cat rakes come in a range of land-clearing options. Our landscape and power box options use hardened teeth to pulverize, aerate, level and condition soil. The landscape rake collects debris in a hopper and the power box rakes at an angle, windrowing debris for easy cleanup. With upper and lower tines, and an open-bottom design, our industrial grapple rake gathers bigger materials.

### Specifications

Attachment Models	Machine Models	Jaw Opening		Width		
		mm	(in)	mm	(in)	
Industrial Grapple	903C2, 906M, 907M, 908M	940	(37)	1829/2134	(72/84)	
		Working Width		Bucket Capacity		
		mm	(in)	m <sup>3</sup>	(yd <sup>3</sup> )	
Landscape	LR15B	903C2, 906M, 907M, 908M	1576	(62)	0.3	(0.39)
	LR18B	903C2, 906M, 907M, 908M	1883	(74)	0.34	(0.44)
		Drum Width		Max Angling (right or left)		
		mm	(in)	degrees		
Power Box		Machine Models				
Manual	PR172	903C2, 906M, 907M, 908M	1829-2286	(72-90)	20	
Hydraulic	PR172*	906M, 907, 908M	1829-2286	(72-90)	20	

\*Requires work tool wiring harness

**Compact Wheel Loaders**

903C2   906M   907M   908M   910M   914M   918M

# SILAGE DEFACERS



## Powering through the bunkers.

Featuring high tensile strength teeth positioned in a helical pattern, our silage defacers free and work loose compacted silage bunkers without damaging or cutting the material. They're also equipped with dual in-board hydraulic motors for stall-free operation and peak torque to power through the densest of silage bunks.

### Specifications

Attachment Models	Machine Models	Overall Width		Weight	
		mm	(in)	kg	(lb)
DFS118	903C2, 906M, 907M, 908M	639	(25.2)	425	(937)
DFS121	903C2, 906M, 907M, 908M	639	(25.2)	477	(1052)
DFS124	903C2, 906M, 907M, 908M	639	(25.2)	503	(1109)

**Compact Wheel Loaders**

903C2   906M   907M   908M   910M   914M   918M



# SNOW BLOWERS



## Quickly clear a path.

Remove snow from streets, parking lots, driveways and sidewalks. Cat snow blowers are built for wet or compacted snow. Our auger pulls snow in and our chute throws it off to the side. And our bolt-on cutting edge ensures the path you clear is clean.

### Specifications

Attachment Models	Machine Models	Intake Width		Throw Distance	
		mm	(in)	m	(ft)
SR117*	903C2	1702	(67)	9.1	(30)
SR118*	906M, 907M, 908M	1854	(73)	12.2	(40)
SR121*	906M, 907M, 908M	2159	(85)	12.2	(40)
SR318**	906M, 907M, 908M	1854	(73)	13.7	(45)
SR321**	906M, 907M, 908M	2159	(85)	13.7	(45)

\*Requires work tool wiring harness.  
 \*\* Requires high flow option and work tool wiring harness.  
**Limited rack back of machine coupler allowed on this tool.**

#### Compact Wheel Loaders

903C2 906M 907M 908M 910M 914M 918M

# SNOW PLOWS



## Scrape snow and ice from ground surfaces.

Windrow snow to either side of the machine or directly ahead. Our snow plows are equipped with a trip edge to clear unseen obstacles. Select from a range of widths.

### Specifications

Attachment Models	Machine Models	Interface	Weight	
			kg	(lb)
1.8 m (6 ft) Plow	903C2, 906M, 907M, 908M	SSL	450	(992)
2.1 m (7 ft) Plow	903C2, 906M, 907M, 908M	SSL	477	(1052)
2.4 m (8 ft) Plow	903C2, 906M, 907M, 908M	SSL	502	(1107)
2.7 m (9 ft) Plow	903C2, 906M, 907M, 908M	SSL	527	(1162)
3 m (10 ft) Plow	903C2, 906M, 907M, 908M	SSL	552	(1218)
2.7 m (9 ft) Plow	910M, 914M, 918M	IT	855	(1884)
3 m (10 ft) Plow	910M, 914M, 918M	IT	902	(1989)
3.7 m (12 ft) Plow	910M, 914M, 918M	IT	989	(2180)

#### Compact Wheel Loaders

903C2 906M 907M 908M 910M 914M 918M

# STRAIGHT SNOW PUSHES



## Remove snow in a single pass.

Our straight snow pushes save time and reduce the amount of salt needed. They're ideal for parking lots, driveways, airport runways and storage lots. Select from a range of widths.

### Specifications


Attachment Models	Machine Models	Interface	Weight	
			kg	(lb)
2.4 m (8 ft) Push Rubber Edge	903C2, 906M, 907M, 908M	SSL	470	(1037)
3 m (10 ft) Push Rubber Edge	903C2, 906M, 907M, 908M	SSL	523	(1152)
3.6 m (12 ft) Push Rubber Edge	903C2, 906M, 907M, 908M	SSL	611	(1348)
2.4 m (8 ft) Push Steel Edge	903C2, 906M, 907M, 908M	SSL	491	(1082)
3 m (10 ft) Push Steel Edge	903C2, 906M, 907M, 908M	SSL	545	(1203)
3.6 m (12 ft) Push Steel Edge	903C2, 906M, 907M, 908M	SSL	636	(1403)
3 m (10 ft) Push Steel Edge	910M, 914M, 918M	IT	818	(1804)
3.6 m (12 ft) Push Steel Edge	910M, 914M, 918M	IT	905	(1994)
3 m (10 ft) Push Steel Edge	910M, 914M, 918M	Bucket Receiver	905	(1994)
3.6 m (12 ft) Push Steel Edge	910M, 914M, 918M	Bucket Receiver	991	(2185)

### Compact Wheel Loaders

903C2 906M 907M 908M 910M 914M 918M



# STUMP GRINDERS

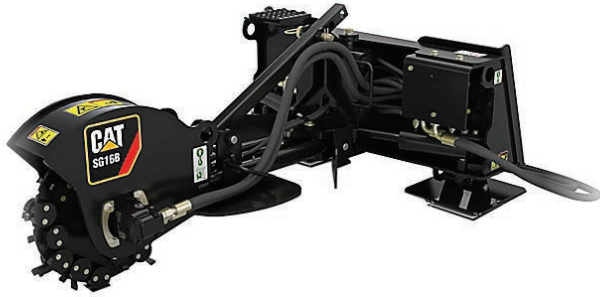

## Make stump removal simple.

Engineered for exceptional maneuverability, Cat stump grinders are ideal for removing multiple stumps in small areas. We offer standard and high-flow models to best match your application. And our cutting wheels bear bolt-on carbide teeth for maximum wood-cutting performance and efficiency.

### Specifications

Attachment Models	Machine Models	Width		Length	
		mm	(in)	mm	(in)
SG16B*	906M, 907M, 908M	1175	(46)	1737	(69)
SG18B**	906M, 907M, 908M	1175	(46)	1737	(69)

\*Requires work tool wiring harness.  
\*\* Requires high flow option and work tool wiring harness.

#### Compact Wheel Loaders

903C2 906M 907M 908M 910M 914M 918M

# TILLERS



## Break apart densely packed dirt.

Cat tillers feature tungsten carbide tines, each hard-faced and double-edged, to effectively churn compacted soil. Select from three settings for a range of tilling depths, depending on your application.

### Specifications

Attachment Models	Machine Models	Width		Working Depth	
		mm	(in)	mm	(in)
LT13B	903C2, 906M, 907M, 908M	1788	(71)	25-152	(1-6)
LT18B	903C2, 906M, 907M, 908M	2271	(90)	25-152	(1-6)

#### Compact Wheel Loaders

903C2 906M 907M 908M 910M 914M 918M

# TRENCHERS



## Cut through compacted soil.

Cat trenchers were engineered to cut narrow, straight-lined trenches. Our anti-backflex chain improves attachment durability in all soil types and our grease ram makes it easy to adjust chain tension.

### Specifications

Attachment Models	Machine Models	Overall Width		Boom Length	
		mm	(in)	mm	(in)
T6B, Manual Side Shift	903C2, 906M, 907M, 908M	1426	(56)	914	(36)
T6B, Hydraulic Side Shift*	903C2, 906M, 907M, 908M	1426	(56)	914	(36)
T9B, Manual Side Shift	903C2, 906M, 907M, 908M	1901	(75)	1219	(48)
T9B, Hydraulic Side Shift*	903C2, 906M, 907M, 908M	1901	(75)	1219	(48)
T15B**	906M, 907M, 908M	1901	(75)	1524	(60)

\*Requires work tool wiring harness.  
\*\* Requires high flow option.

Compact Wheel Loaders						
903C2	906M	907M	908M	910M	914M	918M

# VIBRATORY DRUM COMPACTORS



## Swiftly smooth surfaces.

Before pouring concrete or laying asphalt, smooth foundational surfaces with the Cat vibratory drum compactor. Ideal for compacting soil, sand or gravel as well as compressing asphalt patch work, our compactors are often used by general contractors and utility contractors in residential, commercial and industrial applications.

### Specifications

Attachment Models	Machine Models	Drum Width		Dynamic Force	
		mm	(in)	kg	(lb)
CV16B	903C2, 906M, 907M, 908M	1676	(66)	5399	(11903)
CV18B	903C2, 906M, 907M, 908M	1854	(73)	5399	(11903)

Compact Wheel Loaders						
903C2	906M	907M	908M	910M	914M	918M

# WORK WITHOUT WORRY.

We back our attachments with a one-year warranty and ongoing Cat dealer support. It's another way we're helping protect what you rely on.



# QUICK REFERENCE

Find attachments made for your work.

	Augers	Bale Grabs	Bale Spears	Blades	Brooms	Buckets	Cold Planers	Forks	Material Handling Arms
Site Prep and Demolition				x		x		x	x
Concrete Prep and Flatwork						x	x	x	x
Material Handling		x	x			x		x	x
Excavation and Earth Moving	x			x		x			
Trenching and Utilities	x					x		x	x
Finishing and Site Clean-Up					x	x		x	x
Snow Removal					x				

	Rakes	Silage Defacers	Snow Blowers	Snow Plows	Straight Snow Pushes	Stump Grinders	Tillers	Trenchers	Vibratory Drum Compactors
Site Prep and Demolition	x					x	x		
Concrete Prep and Flatwork									x
Material Handling		x							
Excavation and Earth Moving							x		
Trenching and Utilities								x	x
Finishing and Site Clean-Up	x					x			
Snow Removal			x	x	x				

# QUICK REFERENCE (CONTINUED)

Find attachments made for your machine.

Machine Models	Augers			Bale Grabs		Bale Spears		Blades		Brooms			Buckets			
	A14B	A19B	A26B	1803 mm (71 in)	2133 mm (84 in)	Single Tine	Dual Tine	Angle	Dozer	Angle	Pickup	Utility	General Purpose	Industrial Grapple	Light Material	Mixing Buckets
903C2	X	X		X	X	X	X	X		X	X	X	X		X	
906M	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
907M	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
908M	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
910M										X	X		X			
914M										X	X		X			
918M										X	X		X			

Machine Models	Cold Planers				Forks	Material Handling Arms		Rakes			
	PC104B	PC205B	PC306B	PC310B	Pallet	Fixed Length	3 Position Adjustable	Industrial Grapple	Landscape	Power Box Manual	Power Box Hydraulic
903C2					X	X		X	X	X	
906M	X	X	X	X	X	X		X	X	X	X
907M	X	X	X	X	X	X		X	X	X	X
908M	X	X	X	X	X	X		X	X	X	X
910M					X		X				
914M					X		X				
918M					X		X				

# QUICK REFERENCE (CONTINUED)

Machine Models	Silage Defacers			Snow Blowers					Snow Plows				Straight Snow Pushes							
	DFS118	DFS121	DFS124	SR117	SR118	SR121	SR318	SR321	1.8 m (6 ft) Plow	2.1 m (7 ft) Plow	2.4 m (8 ft) Plow	2.7 m (9 ft) Plow	3 m (10 ft) Plow	3.7 m (12 ft) Plow	2.4 m (8 ft) Push Rubber Edge	3 m (10 ft) Push Rubber Edge	3.6 m (12 ft) Push Rubber Edge	2.4 m (8 ft) Push Steel Edge	3 m (10 ft) Push Steel Edge	3.6 m (12 ft) Push Steel Edge
903C2	X	X	X	X					X	X	X	X	X	X	X	X	X	X	X	X
906M	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
907M	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
908M	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
910M												X	X	X					X	X
914M												X	X	X					X	X
918M												X	X	X					X	X

Machine Models	Stump Grinders		Tillers		Trenchers			Vibratory Drum Compactors	
	SG16B	SG18B	LT13B	LT18B	T6B	T9B	T15B	CV16B	CV18B
903C2			X	X	X	X		X	X
906M	X	X	X	X	X	X	X	X	X
907M	X	X	X	X	X	X	X	X	X
908M	X	X	X	X	X	X	X	X	X
910M									
914M									
918M									